

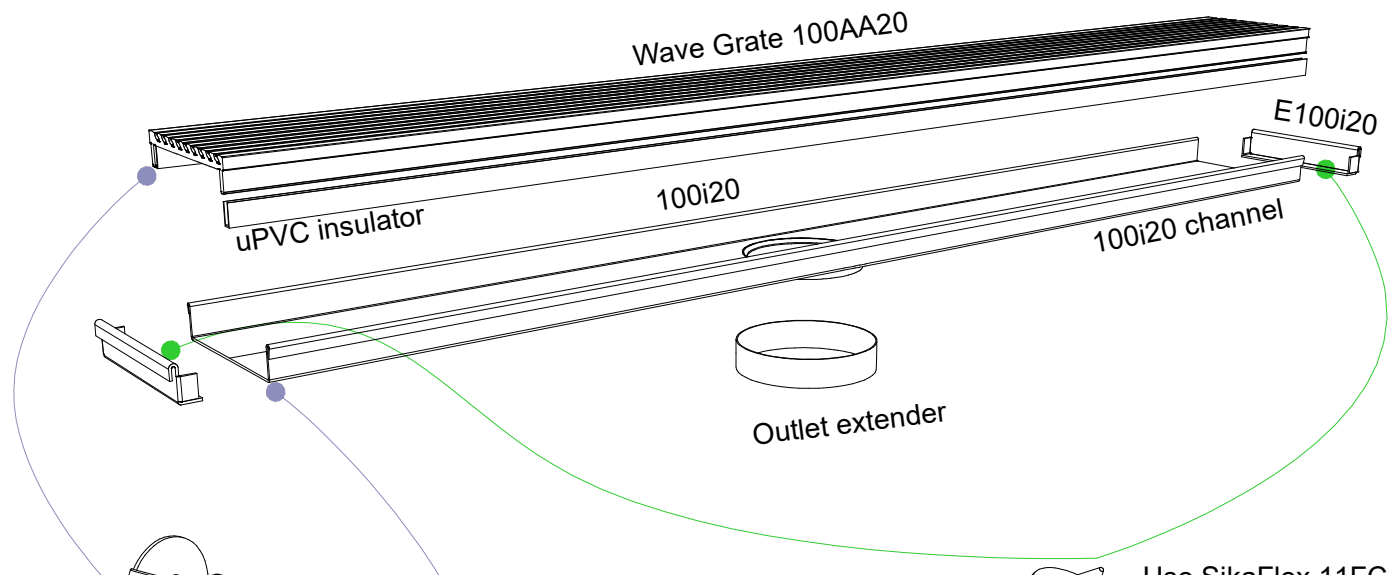



100AAi20 Assembly

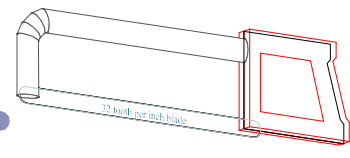



Use a compound saw with aluminium cutting blade to cut grate. The haksaw can also be used.



Use a hacksaw with 32TPI blade to cut stainless channel.



Use SikaFlex 11FC to fix the parts together. Use type 210 primer to prepare the surface.

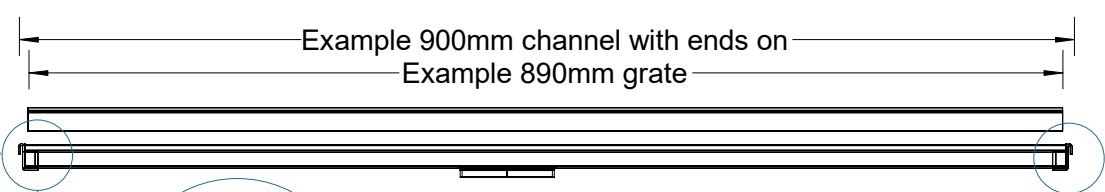

Cut the grate 5mm shorter each side to allow for stop ends. Example, if overall length required is 900mm, cut the grate to 890mm.

